


OnCube SOFTWARE

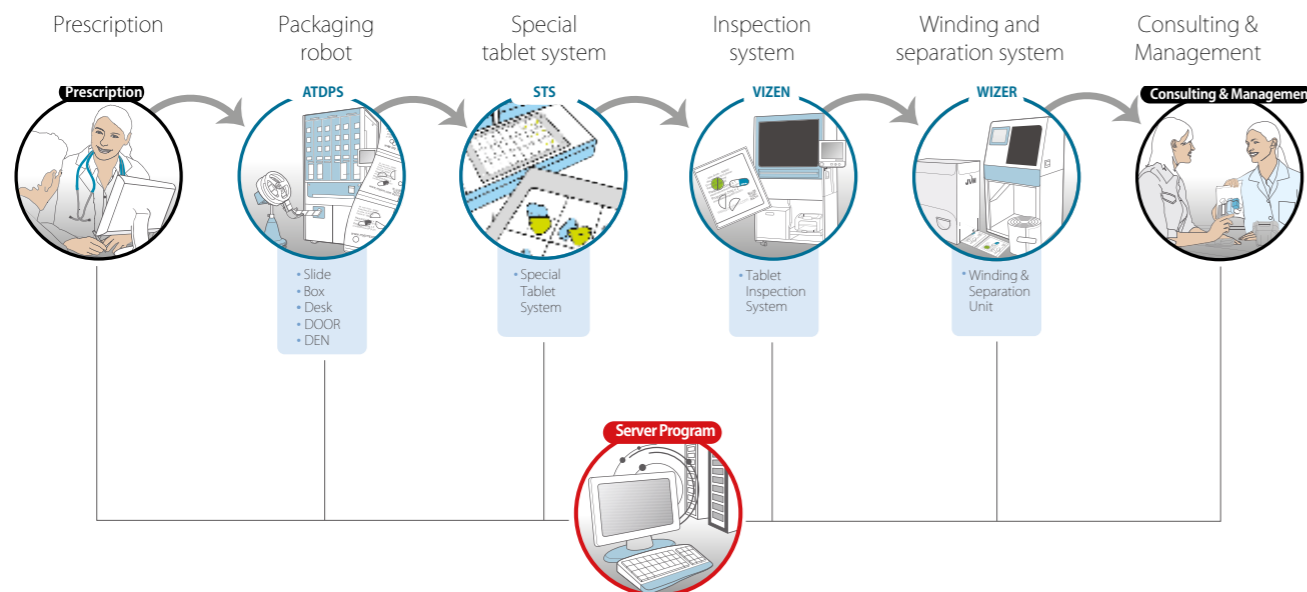

- Workflow control for the total order process in one program.
- Drug data administration using a unique selectable number registration.
- Patient & prescription data scanning and processing.
- Password protected and user-set security.
- Current status of each machine can be quickly and seen on display.
- Production reports generated by system.
- Extensive error logging.
- Supports 2D GS1 barcode functionality.
- One database contains all data for organisational ease.
- Software is G(A)MP compliant; hardware is GMP compliant.
- Displays which machine is most efficient to use for specific operations.
- Optimum planning via the STS Load Station for special tablets.
- User-friendly interface.
- System always accessible – even during production.
- Access to OnCube remotely using the OnCube web service.
- Optimised algorithms calculate best order for production on each machine.

Integration of a personal radio frequency code

A plastic chip with unique radio frequency identification (RFID) replaces user name and password login. By holding the chip against the reader access is gained to the system and all actions are logged per user.

Leasing/rental

JVM Europe understands that growth is only possible when you have the capital to invest. But capital is not always readily available. That's why we are offering a solution to help you grow while at the same time helping you to control your cash flow and operating capital.



ATDPS


Automatic Tablet Dispensing & Packaging System

HIGH-END

JVM offers a series of high-end pouch packaging machines that always fit to your specific pharmacy situation. Developed to facilitate easy and efficient automation of preparing monitored dosage systems.



JVM offers solutions that take into account your local situation.

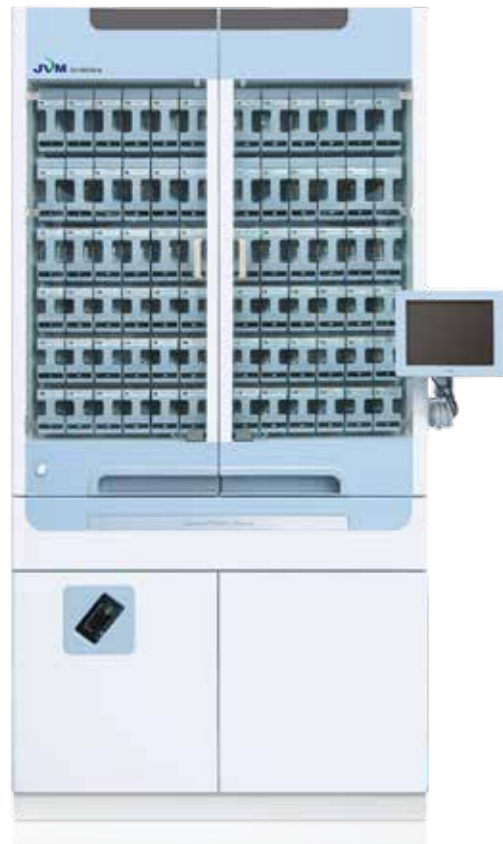

SLIDeType

**JV-330SL6 JV-400SL6
JV-500SL6**



DOORType

**JV-208DO
JV-244DO**



NStype

**JV-300NS10 JV-480NS10
JV-360NS10 JV-576NS10**



Model	JV-330SL6*	JV-400SL6*	JV-500SL6*
Dimensions (WxDxH)	1,087 x 1,207 x 2,007mm	1,087 x 1,207 x 2,162mm	1,087 x 1,207 x 2,299mm
Canister capacity	330EA (S: 202, L: 52, L1: 76)	400EA (S: 202, L: 120, L1: 78)	500EA (S: 288, L: 132, L1: 80)
Weight	About 930 kg	About 1,050 kg	About 1,160 kg
Maximum working rate	Unit-dose: Max 60 pack / min, Multi-dose: Max 50 pack/min		
STS working rate	Max. 50 pack/min		
STS capacity	60 pack / 1 tray		
Auto Canister working rate	Max 40 pack / min		
Auto Canister capacity	Max. 500 tablets (based on 1 tablet sized 7 mm)		
Pouch sizes (HxW)	70x55 mm / 70x75 mm / 70x82 mm (optional)		
Tablet detection	Infrared light detection		
Display and input	Touch Screen 26.4cm (10.4")		
Power consumption	230W (Max. 550W)		
Power supply	120V~, 60Hz / 220-240V~, 60Hz		
Operation Temperature	0~40°C		
Operation Humidity	10~80%		
Printing system	Thermal transfer system : any number of typeface is possible		
Text info	Possible to support graphic Windows environment. Possible to print all characters and barcode.		

Model	JV-208DO*	JV-244DO*
Dimensions (WxDxH)	993 x 633 x 2,048mm	993 x 633 x 2,178mm
Canister capacity (EA)	208 (S : 136, L : 36, L1 : 36)	244 (S : 128, L : 80, L1 : 36)
Weight (Without canister)	About 300kg	About 350kg
Maximum working rate	Unit-dose : MAX. 60 pack / min, Multi-dose : Max 50 pack / min	
STS working rate	MAX. 60 pack / min	
STS capacity	60 pack (1 tray)	
Auto Canister working rate	MAX. 40 pack / min	
Auto Canister capacity	MAX. 500 tablet (Based on 1 Tablet sized 7mm)	
Pouch sizes (HxW)	70 x 55mm / 70 x 75mm / 70 x 82mm (Optional)	
Tablet detection	Infrared light detection	
Display and input	Touch Screen 26.4cm (10.4")	
Power consumption	230W (MAX. 550W)	
Power supply	120V~, 60Hz / 220-240V~, 60Hz	
Operation Temperature	0~40°C	
Operation Humidity	10~80%	
Printing system	Thermal transfer system : any number of typefaces is possible.	
Text info	Possible to support graphic Windows environment. Possible to print all characters and barcode.	

Model	JV-300NS10*	JV-360NS10*	JV-480NS10*	JV-576NS10*
Dimensions (WxDxH)	967 x 870 x 1,996mm	967 x 870mm x 2,179mm	1,262 x 1,020mm x 1,996mm	1,262 x 1,020mm x 2,179mm
Canister capacity	300EA (S: 120, L: 120, L1: 60)	360EA (S: 120, L: 160, L2: 60)	480EA (S: 192, L: 192, L1: 96)	576EA (S: 192, L: 192, L2: 96)
Weight	About 600kg	About 650kg	About 750kg	About 820kg
Maximum working rate	Unit-dose: MAX. 65 / min Multi-dose: MAX. 50 / min			
STS working rate	MAX. 55 pack / min			
STS capacity	60 pack (1 tray)			
Auto Canister working rate	MAX. 40 pack / min			
Auto Canister capacity	MAX. 500 tablet (Based on 1 Tablet sized 7mm)			
Equipable Auto Canister Quantity	MAX 6EA (Optional)		MAX 8EA (Optional)	
Pouch sizes (HxW)	70 x 55mm / 70 x 75mm / 70 x 82mm (Optional)			
Tablet detection	Infrared light detection			
Display and input	Touch Screen 26.4cm (10.4") / Able to mount on right, left			
Power consumption/supply	300W (MAX. 620W) / 220V~, 60Hz			
Operation Temperature/Humidity	0~40°C / 10~80%			
Slide & STS	Automatic / Manual (Optional)			
Side Door	Glass door (Optional)			
Printing system	Thermal transfer system : any number of typeface is possible			
Text info	Possible to support graphic Windows environment. Possible to print all characters and barcode.			

* Product exterior and specifications are subject to change due to the company's research and development results without any prior notice. ** i-Rolly is optional.

* Product exterior and specifications are subject to change due to the company's research and development results without any prior notice. ** i-Rolly is optional.



Certification

ISO 9001 Certified and G(A)MP



Ordering Communication System

Prescription data transfer system



ACRS-II (Optional)

Automatic recognition of tablet location



Barcode settings

Safety management & control



Detachable ribbon cartridge

Easy to use



Print settings

Safety management & control



Special Tablet System (STS)

Supports filling for tablets halved or in a special shape



Touch screen

System status alerts including door open, paper/ribbon empty and current canister volume